

Larch Alaska

PRODUCT DETAILS

Species	Larch
Construction	3-layer engineered (softwood core)
Texture	Brushed
Patterns	Boards / Boards in mixed widths
	Boards Boards in mixed widths
Boards Width Boards Lengths Herringbone sizes Chevron sizes	160mm / 195mm / 245mm Fixed 2200mm Not available Not available
Depth / top layer (+/- 0.5mm)	15 / 4mm (15mm depth with a wear layer of +/- 4mm)** * Maximum board width: 220mm ** Maximum board width: 285mm
Edge profile	Micro bevel

TECHNICAL CRITERIA

Origin	Germany
Formaldehyde Emission	E1 Engineered floors classified as E1 do not emit more than 0.1 ppm of formaldehyde into the ambient air and are 100% safe for interior use.
Certification	PEFC, EU and UK Timber Regulation compliant

GRADES CRITERIA

Grades Knotty (Larch)

Knotty (Larch) Frequent knots including filled knots, typical for softwood timber.





Larch Alaska, brushed




axed Floors, 92 Battle sea Rise, London SW11 1EJ,

waxedfloors.co.uk



STAIR SOLUTIONS

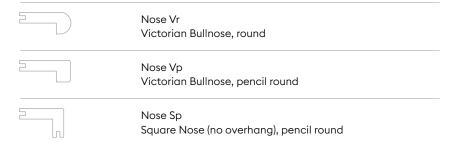

COLOUR VARIATION

Non-fumed

Non-fumed tones have less variation in colour compared to fumed tones. Please note, the natural variation can vary between batches.

Please read our installation guide for information on how to achieve a harmonious looking floor.

PACK SIZE

 $2.11m^2$ for 160mm width, $2.57m^2$ for 195mm width, $3.23m^2$ for 245mm width

INSTALLATION METHODS

Fixed installation	Secretly nailed or fully bonded.
Floating on underlay	Possible, up to a board width of 245mm.
Fully bonded over underfloor heating	Suitable for installation over underfloor heating. Floors must be fully bonded to the substrate. The temperature of the floor surface must not exceed 27 degrees.
	Please refer to our comprehensive <u>installation guide</u> for more information.

RECOMMENDED OIL FOR TOPCOAT

Osmo Polyx Hardwax Oil Clear Semi-Matt 3065 applied by roller/ brush,

Osmo Polyx Hardwax Oil Clear Matt 3062 applied by roller/brush

Please read our guide on post installation requirements and application of the topcoat of oil.



MAINTENANCE

For regular damp mopping use the Osmo Wash & Care Soap

Please read the maintenance guide/o+m available from Waxed Floors.